



Bendix-leading the way in engineering and development of application specific products.


All Bendix® linings meet or exceed FMVSS121.

Our ES 1100 GG lining provides a powerhouse of security. Designed with a full metallic lining, ES 1100 provides a premium lining for single axles up to a maximum of 26,000 lbs., and tandem axles up to a maximum of 52,000 lbs. G.A.W.R., using 16.5" x 8.63" brakes with 180 AL factor as specified in the chart below.

ES 1100 handles a complete weight range, from empty to maximum load with consistent brake performance. Its uniquely formulated high-friction metallic compound is designed to handle high temperature and severe duty environments on and off the road.



## ES 1100 GG Lining

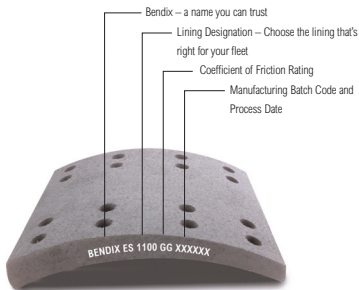

### Applications:

Mining  
Logging  
Construction  
Fire Trucks  
Heavy vocational vehicles

### Notes:

Available on ES or XLII shoes  
Large torque capacity  
Great stopping power

### Market Competition:

Carlisle MB60  
BrakePro CM46  
GreyRock GM2040FF  
Abex 6069GG

Size	FMSI	AL Factor	Rolling Radius	Max. G.A.W.R. Single/Tandem	Shoe Type	Bendix Friction
16.5" X 7"	4707	165 / 180	19.6"	23k / 46k	DAP	ES 1100 GG
16.5" X 7"	4708	165 / 180	19.6"	23k / 46k	DAP	ES 1100 GG
16.5" X 7"	4709	165 / 180	19.6"	23k / 46k	SAP	ES 1100 GG
16.5" X 8.63"	4726	180	19.6"	26k / 52k	SAP	ES 1100 GG
16.5" X 8.63"	4711	180	19.6"	26k / 52k	SAP	ES 1100 GG